
LED DRIVER

JINBO

150W WATERPROOF LED DRIVER

Universal 100–277V AC input, 12V DC output, IP67 for indoor & outdoor use.

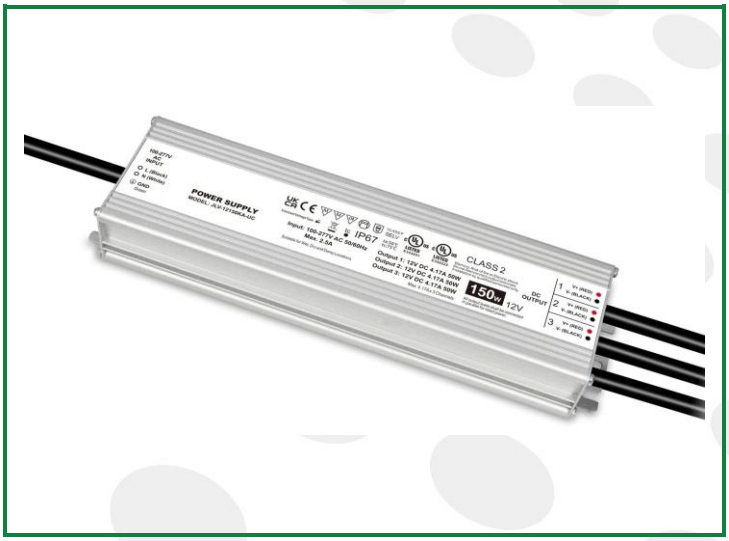

JINBO 150W Waterproof LED Driver is a constant-voltage power supply for 12V DC LED lighting and signs. It accepts a universal 100–277V AC input and delivers a full 150W output at 91% typical efficiency, split across three 12V DC, 50W Class 2 output channels. Housed in an IP67 aluminum enclosure for indoor and outdoor use, it is UL listed and protected against overload and short circuit with automatic recovery. Every unit is 100% full-load burn-in tested.

PRODUCT FEATURES

- Constant Voltage Output: 12V DC
- Input Voltage 100–277V AC
- 150W Rated Output Power
- High Transfer Efficiency
- IP67 Waterproof Aluminum Housing
- Suitable for Indoor & Outdoor Use
- Overload & Short-Circuit Protection
- 100% Full-Load, 100% Burn-In Tested
- UL Listed
- Class 2 & SELV Certified

APPLICATION

- High-Density LED Strip Runs
- Commercial Signage
- Architectural Linear Lighting
- Cove Lighting
- Retail Display Lighting
- Large LED Installations

ELECTRICAL SPECIFICATIONS

- Input Voltage 100–277V AC
- Input Frequency 50/60Hz
- Input Current 2.5A Max. (per label)
- Output 12V DC 12.5A (3 × 4.17A)
- Rated Power 150W
- Efficiency 91%
- Ripple & Noise <300mVp-p
- Line / Load Regulation 1% / 1%

INPUT & OUTPUT CONNECTIONS

- Input: Black SJTW, 3-Conductor, 18 AWG
- Output: Black SJTW, 2-Conductor × 3, 18 AWG
- Output Polarity: Red (+), Black (–)
- Lead Length: 8.66" Input & Output
- Cable Diameter: 0.24" ±0.004"

MECHANICAL SPECIFICATIONS

- Housing Aluminum
- IP Rating IP67
- Working Temp. -25°C ~ +50°C

BEYOND™ LED TECHNOLOGY

(866) 786-1117 • www.BeyondLEDTechnology.com

Due to continuous product improvement, information in this document is subject to change.

JINBO
LED DRIVER

WHY CHOOSE JINBO LED DRIVER


- 150W at 12V DC from One Compact Driver
- Universal 100–277V AC Input
- IP67 Waterproof for Indoor & Outdoor Installations
- Dual Listed for Lighting and Sign Applications
- 91% Typical Efficiency
- Three 50W Class 2 Output Channels
- Hiccup-Mode Protection with Automatic Recovery

CERTIFICATIONS & COMPLIANCE

- UL Listed
- Class 2, SELV
- IP67 Rated

SERVICE ENVIRONMENT

- Working Temp. -25°C ~ +50°C
- Working Humidity 15 ~ 99% RH
- Storage Temp. -40°C ~ +85°C
- Storage Humidity 15 ~ 99% RH

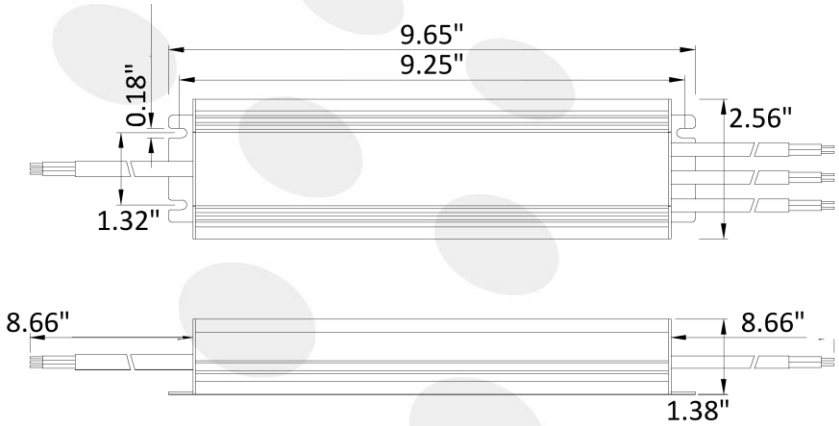

Dimensions shown in inches. Housing: Aluminum.

QUICK SPEC TABLE

SKU	MODEL NUMBER	WATT	WORKING TEMP	ENVIRONMENT	MAX. OUTPUT CURRENT	INPUT VOLTAGE	OUTPUT VOLTAGE	EFFICIENCY	IP RATING	CERTIFI-CATIONS
157579	JLV-12150KA-UC	150W	-25°C ~ +50°C	Indoor & Outdoor	12.5A	100–277V AC	12V DC	91%	IP67	UL

JINBO
LED DRIVER

Electrical Data


AC INPUT	
Input Voltage	100–277V AC
Input Frequency	50/60Hz
Efficiency (Typ.)	91%
Input Current	2.5A Max. (per product label)
Inrush Current	70A
Leakage Current	5mA/230VAC

SAFETY	
Safety Standard	EN 61347-2-13, UL 1310, UL 8750
Withstand Voltage	I/P-O/P: 1750VAC/1min/<5mA
Isolation Resistance	I/P-O/P: >100M Ohms / 500VDC / 77°F / 70%RH


DC OUTPUT	12V
SKU	157579
Model	JLV-12150KA-UC
Output Voltage	12V
Rated Current	12.5A
Output Channels	3 × 4.17A / 50W
Rated Power	150W
Ripple & Noise (Max.)	<300mVp-p
Setup, Rise Time	1500ms
Line Regulation	1%
Load Regulation	1%

Performance Data


Derating Curve

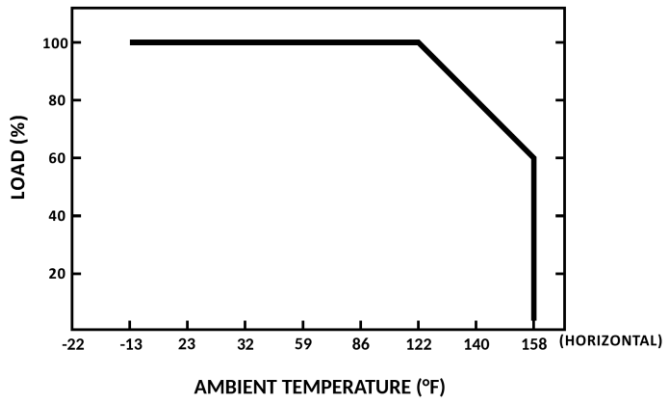

Static Characteristics

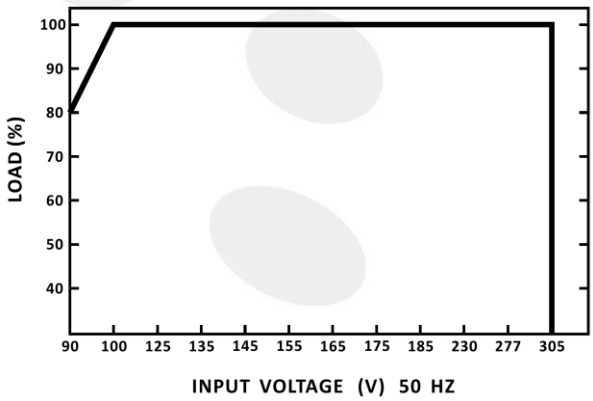

Block Diagram

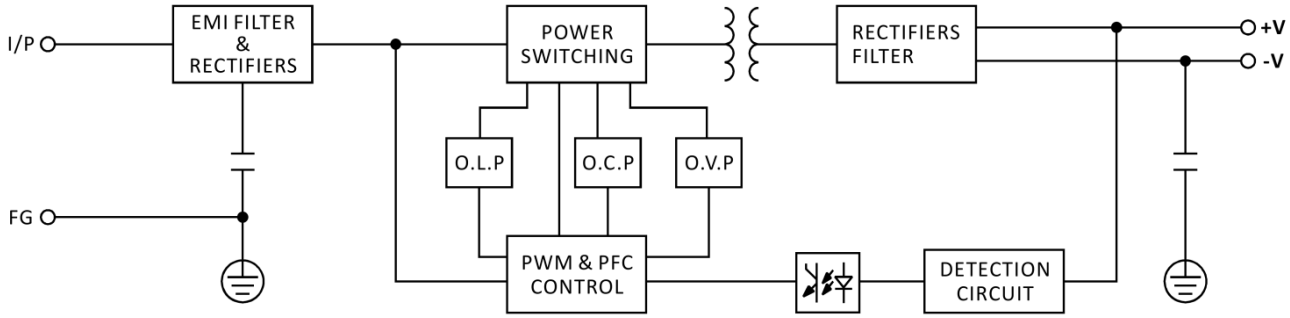

BEYOND™ LED TECHNOLOGY
(866) 786-1117 • www.BeyondLEDTechnology.com
Due to continuous product improvement, information in this document is subject to change.

Installation

IMPORTANT SAFETY INFORMATION

- Warning: risk of fire or electric shock – installation by qualified personnel only
- Identify the driver's input and output before installation
- Power on only after all wire connections are complete
- Verify the supply voltage is within the 100–277V AC input range
- Do not interconnect output terminals

GENERAL INSTALLATION NOTES

- Suitable for indoor and outdoor use; IP67 waterproof housing
- Install the driver in a location with good ventilation and cooling
- Mount the driver as near to the LED load as possible to avoid voltage drop on the output wiring
- If long extension wires must be used, use thicker wires and reduce the connected load wattage


WIRING INSTRUCTIONS

AC Input (3-Conductor, Black SJTW Cable)


- Line (L) / Neutral (N): as marked on the driver label
- Ground: Green/Yellow

DC Output (3 × 2-Conductor, Black SJTW Cables)

- Red – Positive (+)
- Black – Negative (–)
- Ensure correct + and – connection to the LED load
- 12V model: Outputs 1, 2 and 3 each 12V DC 4.17A 50W

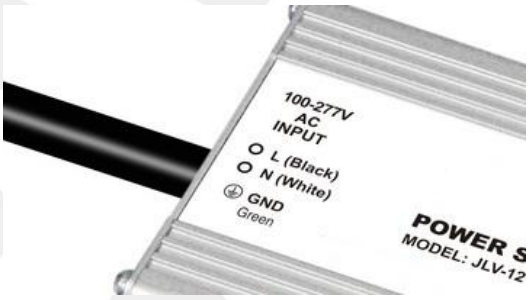

AC input end – label markings

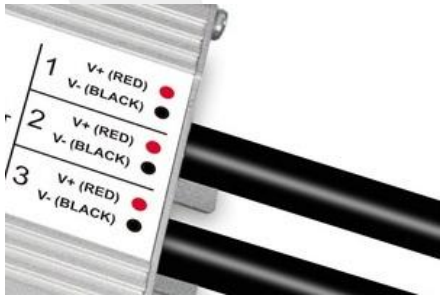

DC output end – 3 output channels (12V model shown)

PROTECTION

Overload: active when the load exceeds 105–120%. The output shuts off and operates in hiccup mode.

Short Circuit: hiccup mode; recovers automatically after the fault condition is removed.


LOCATION RATING

- Suitable for wet, dry and damp locations
- Rated ambient (ta) 50°C; case temperature (tc) 75°C

Installation

MOUNTING DIMENSIONS

Overall Length 9.65"
Width 2.56"
Height 1.38"
Input / Output Leads 8.66"
Refer to the drawing for mounting tab dimensions.

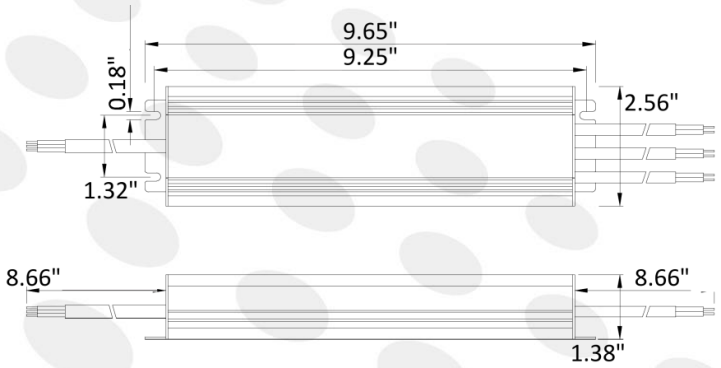

FINAL CHECK

- Confirm input and output leads are correctly identified
- Confirm output polarity: Red (+), Black (–)
- Confirm all wire connections are complete and secure
- Energize circuit

Packaging

SKU#	Model	Carton Dimension	Qty	Net Weight (each)	Gross Weight (per carton)
157579	JLV-12150KA-UC	13.39" × 11.22" × 7.68"	16 PCS/Carton	2.11 LBS	35.71 LBS

Product dimension: 9.65" × 2.56" × 1.38"

Warranty

- Warranty terms and coverage period: see Beyond LED Technology terms and conditions
  https://beyondledtechnology.com/pages/terms-and-conditions