




SPARKLING PATH™

Gondola Light

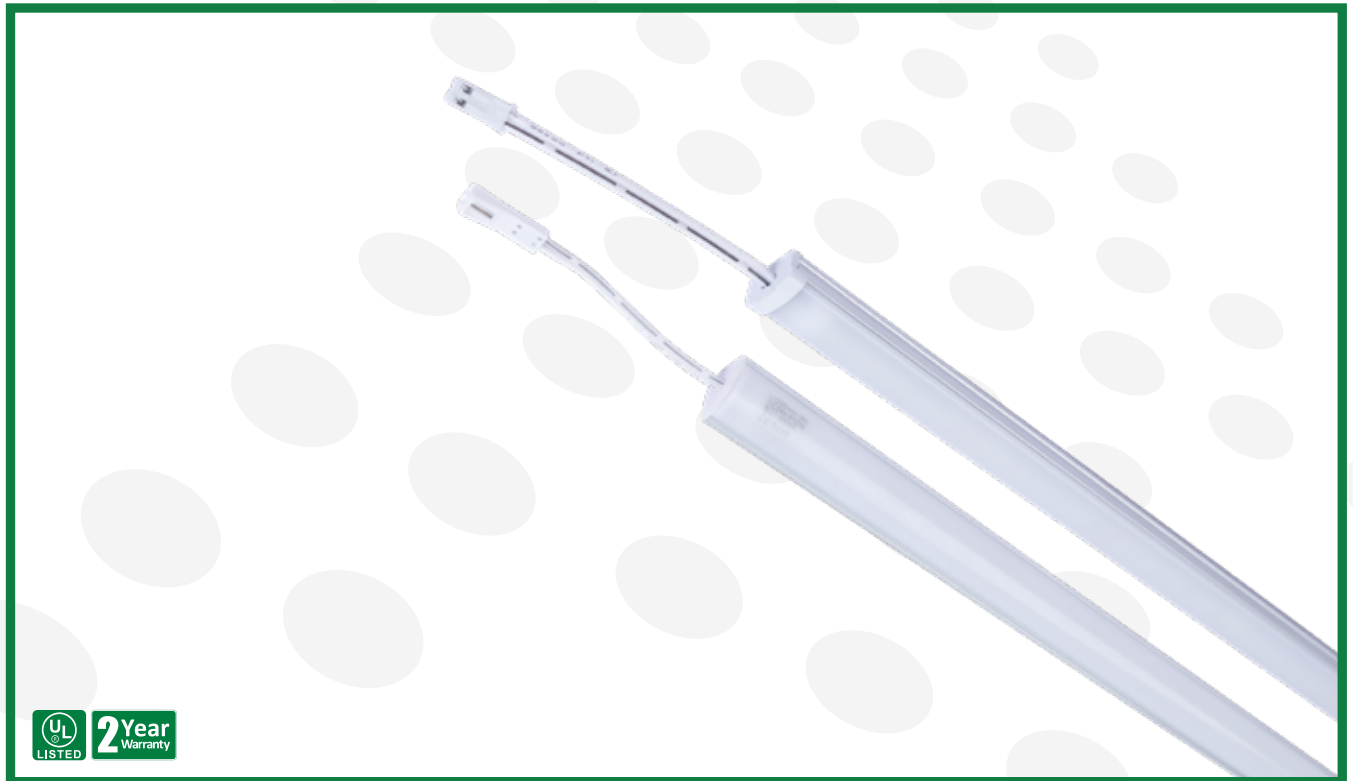

SKU #	Model #
156806	OY101
156807	OY1616

Beyond LED Technology's Sparkling Path LED Gondola Shelf Light is the perfect lighting solution for enhancing product visibility and presentation in retail spaces. This innovative lighting system makes displays more attractive and engaging, ensuring products stand out to customers. Designed for quick installation, the magnetic LED strips offer bright, uniform illumination that elevates the shopping experience. With a cool white 6500K color temperature and a wide beam angle, the Sparkling Path lights create an inviting, well-lit environment while providing energy-efficient performance. The 4ft magnetic LED strip is equipped with 12W per strip, making it ideal for gondolas, shelves, and retail displays. The 120° beam angle or V-shape 90° beam angle ensures focused lighting for various display needs. Each kit includes 4 shelf lights, 1 magnetic strip, 96W power supply, and 4 connectors, offering a complete solution for retail lighting installations.

Product Features

- 4FT Magnetic LED Strip
- 12 Watt/Strip
- CCT 6500K
- Input Voltage 24V DC
- 120° Beam Angle
- V Shape 90° Beam Angle
- 4 x 4 FT LED Shelf Lights
- 1 x 4 FT Magnetic Strip
- 1 x 96W Power Supply
- 1 x 4 Connectors
- UL Listed

SPARKLING PATH™

Gondola Light



SKU	WATT	MAX LUMENS	CCT	INPUT VOLTAGE	CRI	SIZE	LIGHT SPREAD	CONSTRUCTION	SHAPE	CERTIFICATIONS
156806	12W	600	6500K	24V DC	>80	4'	120°	Aluminum+PC	Straight	UL
156807	12W	560	6500K	24V DC	>80	4'	90°	Aluminum+PC	V-Shape	UL

SKU: 156806

Specifications

Parameter	Description	Value
General Performance	Model #	OY101
	Watt	12W/M
	Max Lumens	600
	Lumen Efficacy	Up to 50LM/W
	Color Temperature	6500K
	CRI (Ra)	>80
	Light Spread	120°
	Diffuser Type	Al+PC Cover
Electrical	Input Voltage	110V DC
	Output Voltage	24V
	Frequency	50/60Hz
	Adapter	Power Supply 96W
	Dimming	No
Physical	Shape	Straight
	LED Brand	San'an
	LED Type	SMD2835
	LED QTY	160 PCS
	Construction	Al+PC Cover
Qualification	Housing Color	White
	IP Rating	IP20
	Warranty	2 Years Warranty



SPARKLING PATH™

Gondola Light

SKU: 156807

Specifications


Parameter	Description	Value
General Performance	Model #	OY1616
	Watt	12W/M
	Max Lumens	560
	Lumen Efficacy	Up to 50LM/W
	Color Temperature	6500K
	CRI (Ra)	>80
	Light Spread	90°
	Diffuser Type	Al+PC Cover
Electrical	Input Voltage	110V DC
	Output Voltage	24V
	Frequency	50/60Hz
	Adapter	Power Supply 96W
	Dimming	No
Physical	Shape	V - Shape
	LED Brand	San'an
	LED Type	SMD2835
	LED QTY	160 PCS
	Construction	Al+PC Cover
Qualification	Housing Color	White
	IP Rating	IP20
	Warranty	2 Years Warranty

SPARKLING PATH™

Gondola Light





Correlated Color Temperature (CCT)


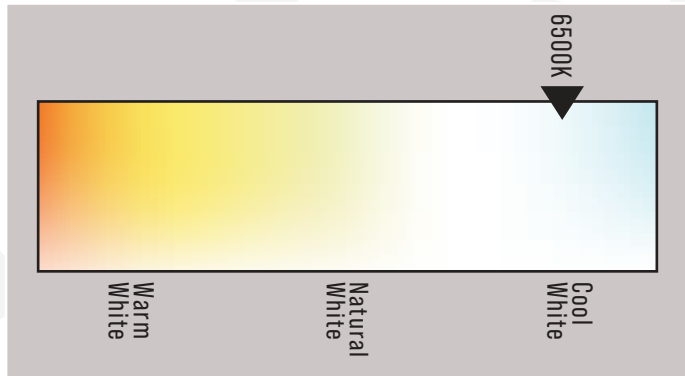


Dimension


Magnetic Light Strip

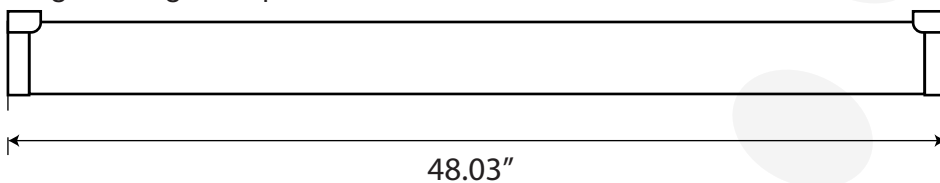

Magnetic light strip

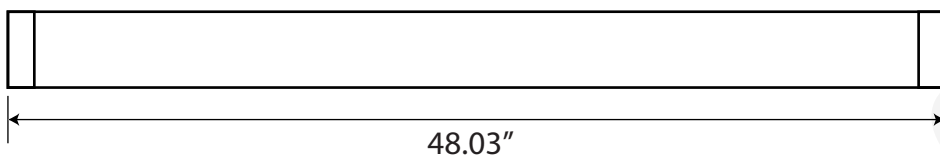

Accessories

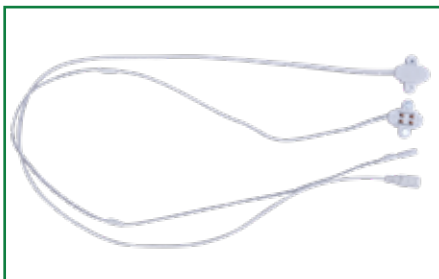






SPARKLING PATH™


Gondola Light

Installation


- 1, Unpacking the carton, find below the components ① Track*1pcs ② Track-LED Bar Connector*4pcs ③ LED Bar*4pcs ④ Power Supply-Track Connector*1 ⑤ . DC Power Supply.

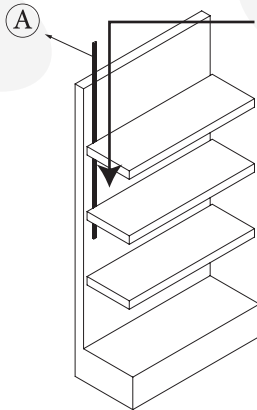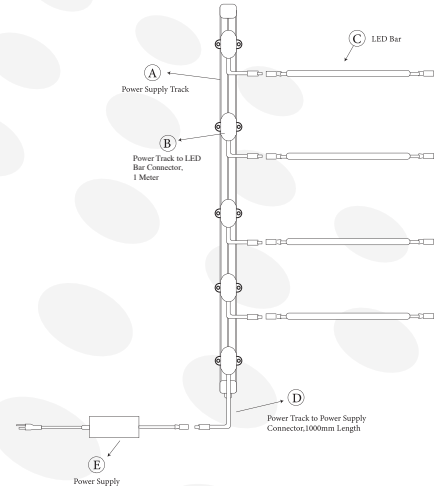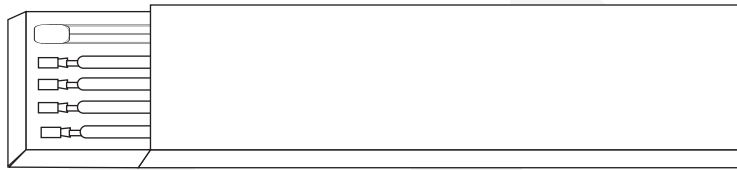


- 2, From top, slide the ① Track between the shelves and back wall, place it at a position which is convenient to connect all led bars

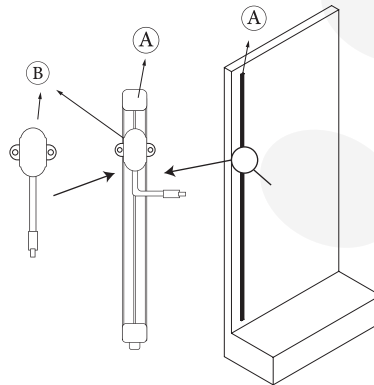


- 3, Clip the magnetic ② Track-LED Bar Connector onto the ① Track and fix the ① Track

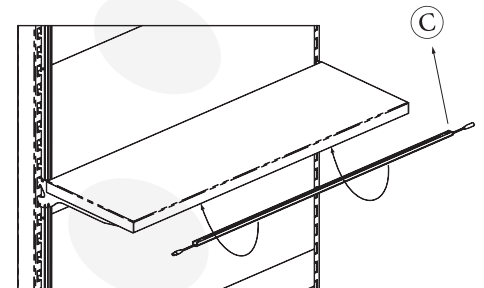

- 4, Attach the magnetic ③ LED Bar under shelves

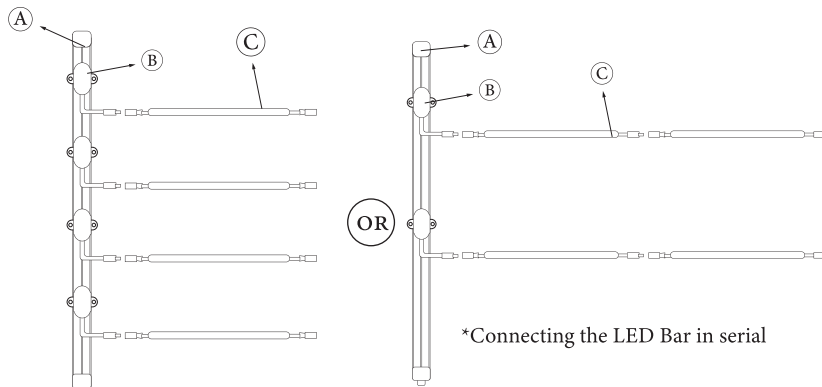

- 5, Connect the ② Track-LED Bar Connector with ③ LED Bar, organize the wire by using the small magnet on it

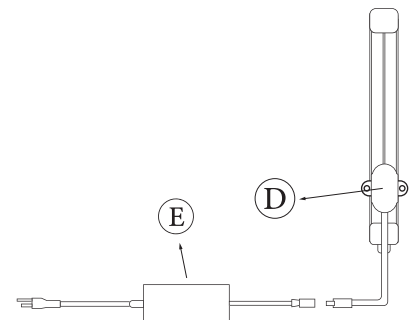

- 6, Use the ④ Power Supply-Track Connector connect the ① Track and ⑤ Power Supply, afterwards connecting the ⑤ DC Power Supply to AC power.

SPARKLING PATH™

Gondola Light



Packaging

SKU	Size	Box Dimension	Qty	Net Weight	Gross Weight
156806	4FT	55.11" x 13.18" x 9.28"	4 Pcs/Box	4LBS	4.51LBS
156807	4FT	55.11" x 13.18" x 9.28"	4 Pcs/Box	4LBS	4.51LBS

Application Image



GONDOLA LIGHT



SPARKLING PATH™

Gondola Light

Application Image



Warranty

This product is covered under a 2-year warranty. For complete warranty details, [Click Here.](#)